




HONDA TALON R


803-01-618 FRONT - 803-01-619 REAR
RACE SPRING SPECIFICATION

FRONT

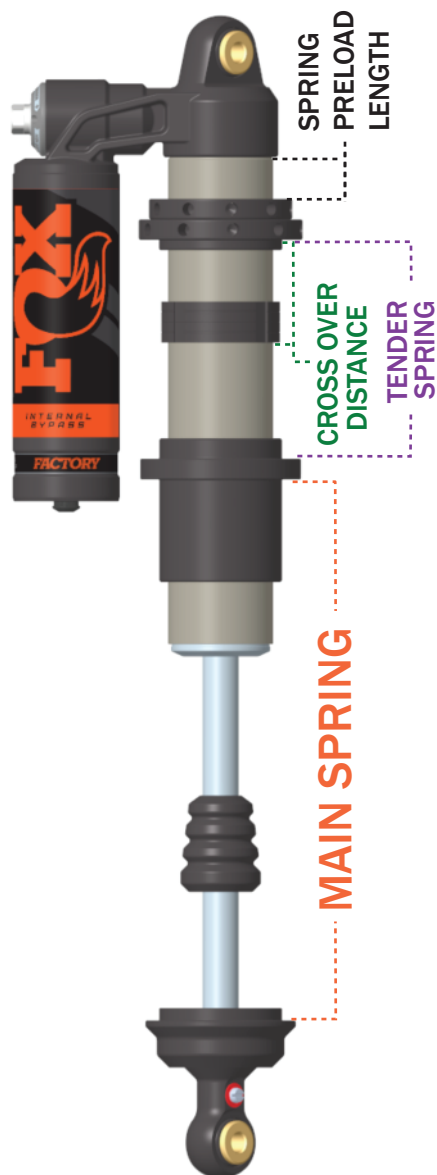

885-08-500
985-08-500 R
985-08-501 L

REAR

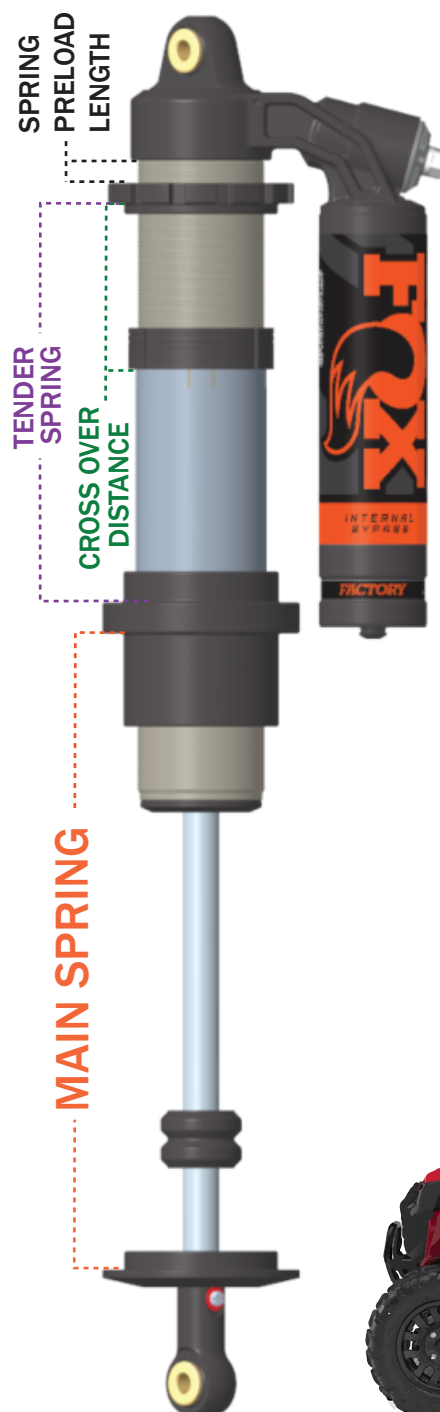

885-08-502
985-08-502 R
985-08-503 L

FRONT

MAIN = 14" x 225 lb/in
039-38-225-A
TENDER = 6" x 300 lb/in
039-83-300-1
SPRING PRELOAD LENGTH = 1"
CROSS OVER DISTANCE = 2 1/2"
RIDE HEIGHT = 14"

REAR

MAIN = 16" x 250 lb/in
033-23-250-1
TENDER = 6" x 300 lb/in
039-49-300-A
SPRING PRELOAD LENGTH = 1/2"
CROSSOVER DISTANCE = 4"
RIDE HEIGHT = 14"

NOTE:
Jack the vehicle up off the ground to fully extend shocks to replace springs. Shocks have internal negative spring, compress by pushing down on the wheel.

When checking : RIDE HEIGHT
Push down on front and rear of the machine 3 times, then roll the machine forward and backwards a couple of feet to remove wheel scrub and seat springs.

Ride height measurements with stock tires and rims.



Measure Ride Height
at each end of flat section
of the frame.