




# KAWASAKI KRX

803-01-622 FRONT - 803-01-623 REAR  
SPORT SPRING SPECIFICATION

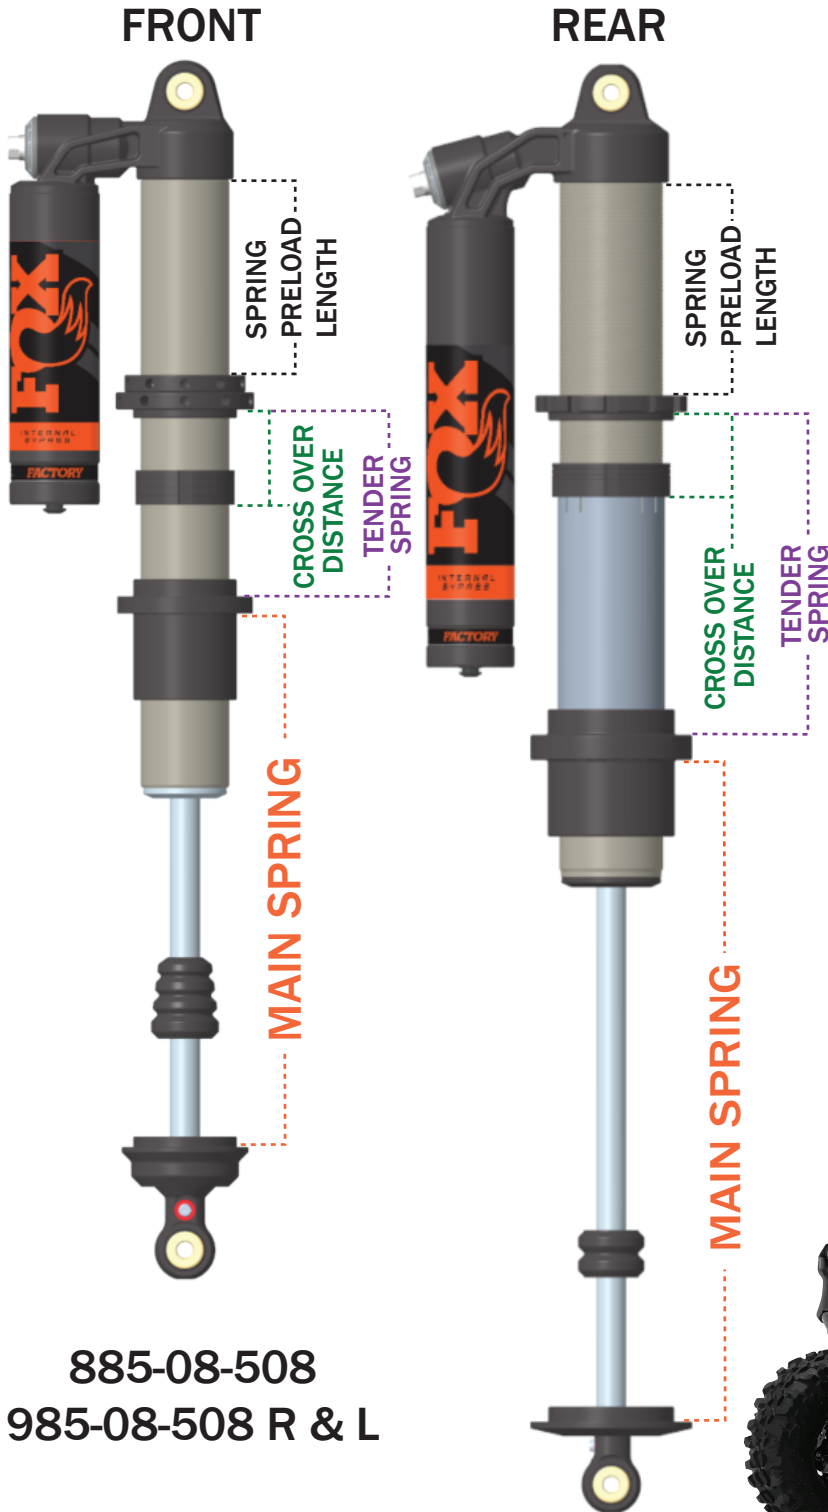

**885-08-508**  
**985-08-508 R & L**

**885-08-509**  
**985-08-509 R & L**

### FRONT

- MAIN** = 16" x 300 lb/in  
039-39-300-A
- TENDER** = 6" x 300 lb/in  
039-83-300-1
- SPRING PRELOAD LENGTH** = 5 5/8"
- CROSS OVER DISTANCE** = 2 3/4"
- RIDE HEIGHT** = 14"

### REAR

- MAIN** = 20" x 200 lb/in  
039-46-200-A
- TENDER** = 10" x 100 lb/in  
039-49-100-A
- SPRING PRELOAD LENGTH** = 6 1/4"
- CROSSOVER DISTANCE** = 2 1/2"
- RIDE HEIGHT** = 14"

**NOTE:**  
Jack the vehicle up off the ground to fully extend shocks to replace springs. Shocks have internal negative spring, compress by pushing down on the wheel.

When checking : RIDE HEIGHT  
Push down on front and rear of the machine 3 times, then roll the machine forward and backwards a couple of feet to remove wheel scrub and seat springs.

Ride height measurements with stock tires and rims.



Measure Ride Height at each end of flat section of the frame.